

# Folding tent ZP range

Tents specially designed for receptions, cultural and sporting events. They feature all the characteristics of a structure designed for instant deployment but now adapted for use in near permanent settings. Self-blocking corner system and easy automatic locking. 100% anodized aluminum ZP frame premium quality EN 573 6060, injected fiber glass connector pieces, stainless steel bolts, integrated tension cables.

## LEGEND

- 1 Aluminum bracket + ZP system
- 2 Injected fiber glass connector
- 3 Anodized aluminum profile
- 4 Stainless steel bolts
- 5 Aluminum scissors
- 6 Foot plate
- 7 Fully hermetic finish on bottom by Velcro
- 8 Sliding wall in upper part with Kim sliding part


## AVAILABLE SIZES

<b>ZP330</b>	3mx3m 9 sqm	<b>ZP460</b>	4mx6m 24 sqm
<b>ZP360</b>	3mx6m 18 sqm	<b>ZP480</b>	4mx8m 32 sqm
<b>ZP440</b>	4mx4m 16 sqm	<b>ZP480R</b>	4mx8m 32 sqm
<b>ZP550</b>	5mx5m 25 sqm	<b>ZP5HEXA</b>	Ø5m 16,2 sqm
<b>ZP660</b>	6x6m 36 sqm	<b>ZP6HEXA</b>	Ø6m 23,4 sqm



	Weight	Measurements when folded	Height of peak	Number of legs	Number of peaks	Surface	Height under flap
<b>ZP330</b>	50kg	1,60x0,36x0,40	3,60m	4	1	9 sqm	1,97 à 2,20m
<b>ZP360</b>	80kg	1,60x0,36x0,65	3,60m	6	2	18 sqm	1,97 à 2,20m
<b>ZP440</b>	59kg	2,01x0,36x0,40	3,60m	4	1	16 sqm	1,97 à 2,20m
<b>ZP550</b>	114kg	1,60x0,60x0,60	3,60m	4	1	25 sqm	1,97 à 2,20m
<b>ZP5HEXA</b>	95kg	1,60x0,73x0,80	3,60m	6	1	16,2 sqm	1,97 à 2,20m
<b>ZP6HEXA</b>	102kg	1,60x0,73x0,80	3,60m	6	1	23,4 sqm	1,97 à 2,20m
<b>ZP660</b>	132kg	1,60x0,60x0,60	3,60m	4	1	36 sqm	1,97 à 2,20m
<b>ZP460</b>	82kg	2,01x0,36x0,54	3,60m	4	2	24 sqm	1,97 à 2,20m
<b>ZP480</b>	110kg	2,01x0,36x0,68	3,60m	6	3	32 sqm	1,97 à 2,20m
<b>ZP480R</b>	111kg	2,01x0,36x0,68	3,60m	8	3	32 sqm	1,97 à 2,20m

AVAILABLE IN PAGODA SHAPE (cf page 24)

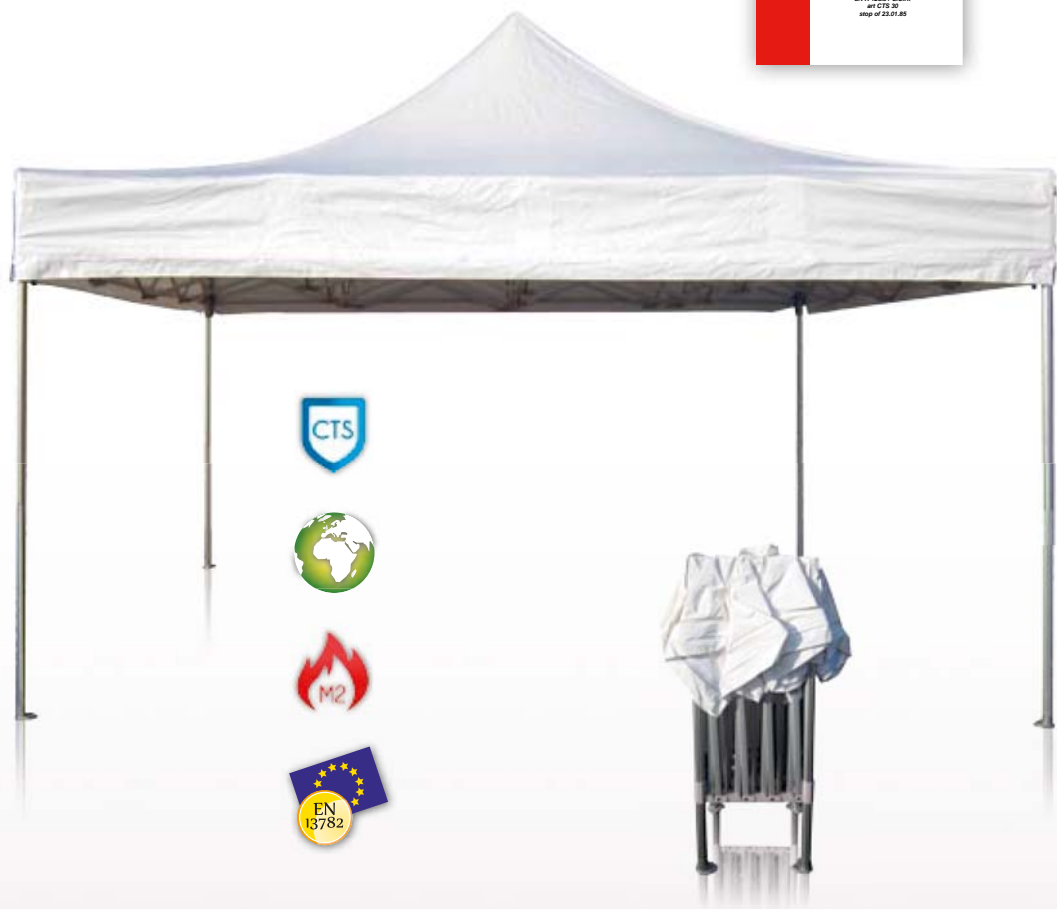

PACK CONTENTS

Frame, top and technical protective cover.



ADVANTAGES ZP

**Extreme use**  
 5 year warranty  
 European safety standard **EN13782**  
 Approvable CTS according NV 1965 (snow and wind)  
**M2 fire-resistant fabric PVC 380gr/sqm**  
 Locking of corner without effort  
 Maximum mechanical stability  
**Sliding walls with ties**  
 Structure 100% anodized aluminum  
**Wind resistance: 100km/h**  
 (with proper tethering)

Flexible and resistant PVC fabric with a unique design, treated for ultra violet protection and a lacquered finish which ensures maximum longevity. Resistance -30° + 70°C. Sliding walls on keder + sliding and injected KIM® part.

AVAILABLE COLORS

			RAL 2007
RAL 9016	RAL 1023	RAL Coca Cola	RAL 7042
RAL 6005	RAL 9011	RAL 5005	RAL 1015

- 1 Optional keder on bottom of wall for a perfect tension.
- 2 Backing and strap on the cross brace.
- 3 Reinforcement on the upper section.
- 4 Reinforcement and attachment with scissors.
- 5 Finish at the lowest point by Velcro. Fully hermetic tent.
- 6 Steel reinforcement in extremity of keder avoids tearing the fabric on intensive use.
- 7 Sliding wall on keder. KIM system®.
- 8 Reinforcement and attachment on each corner.

